

BUILDING WRAP



TEKTON®
HouseWrap

A new revolution in building wrap



BRANZ Appraised
Appraisal No.548 [2007]




Marshall
Waterproofing
Professional Solutions

50
YEARS
Durability



Air barrier for
unlined walls




Exceptional
water
hold-out



Fire retardant

TEKTON House Wrap *The Builder's Choice*

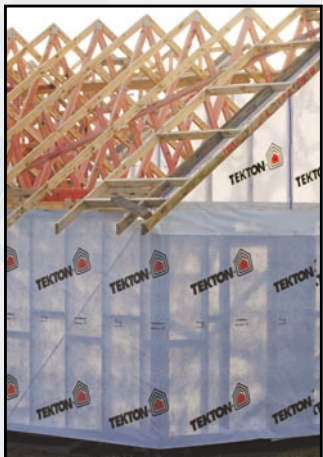

- Tekton House Wrap is **BRANZ Appraised #548 (2007)**.
- Tekton is a **breather type** coated, spun-bonded polypropylene.
- Tekton can be left **exposed for 60 days**.
- Tekton has **superior water holdout**. Taking the industry to a new level for water resistance.
- Tekton has **optimal surfactant resistance**. Wash your building with confidence.
- Tekton is **fire retardant**.
- Tekton is a leader in **tear strength**.
- Tekton is suitable in **all wind zones**.
- Tekton can be used with no internal wall linings, ie: **gable ends**.
- Tekton increases your building's **energy efficiency**.
- Tekton has a **50 year durability warranty**.
- Tekton can be used for **residential and commercial** applications.

For best results, use with



BRANZ Appraised

Protecto Wrap Tapes

benefits of **Tekton** house wrap

- COST EFFECTIVE
- LIGHT WEIGHT
- FIRE RETARDANT
- WATER RESISTANT
- BRANZ APPRAISED
- 50 YEAR WARRANTY

please note:

- For peace of mind use with BRANZ Appraised Protecto Wrap tapes.
- Tekton House Wrap must not be used behind face fixed non absorbent claddings such as vinyl or metal.
- Tekton House Wrap can be used on all absorbent and non-absorbent wall claddings installed over 18mm minimum drainage cavity.
- Tekton House Wrap can be used in all wind zones up to and including "Very high".
- Tekton House Wrap may be used as a slip layer over rigid backings for stucco plaster in accordance with the requirements of NZDC acceptable solutions E2/AS1 paragraph 9.3.3(b).
- Tekton House Wrap has an AS 1530 Part 2 Flammability Index of 0 and meets the requirements of NZBC Acceptable Solution C/AS1 Part 6, Table 6.2 for surface finish requirements for suspended flexible fabrics, and therefore it may be used with no restrictions in all buildings.
- Tekton House Wrap must be separated from fireplaces, heating appliances, flues and chimneys in accordance with the requirements of NZBC Acceptable Solution C/AS1 Part 9 for the protection of combustible materials.
- BRANZ Appraised - Appraisal # 548 (2007).

other professional solutions by Marshall Waterproofing

- Protecto Sill System – Window and door protection, BRANZ Appraisal # 444 (2005).
- Protecto Tape - Parapet and handrail protection, BRANZ Appraisal #450 (2005).
- Anti Fracture Membrane (AFM) – crack suppression and waterproofing for under tiles.
Interior BRANZ Appraisal # 461 (2005).
Exterior BRANZ Appraisal # 449 (2005).
- Protecto Wall – Tanking and below ground applications, BRANZ Appraisal # 517 (2006).
- Pro-Joist - Cantilevered deck joist protection, BRANZ Appraisal #497 (2006).
- Pro-Drain 8 - The protection board that creates a neutral pressure zone between the foundation wall and subsoil.

Nov 2007