


H3.1 Timber packer with raking top edge to support metal flashing - no fixing required. (By other trade)

Cover top surface of packer with underlay to isolate metal cap from timber

Ex 20x5mm H3.1 timber packer to each side of parapet.

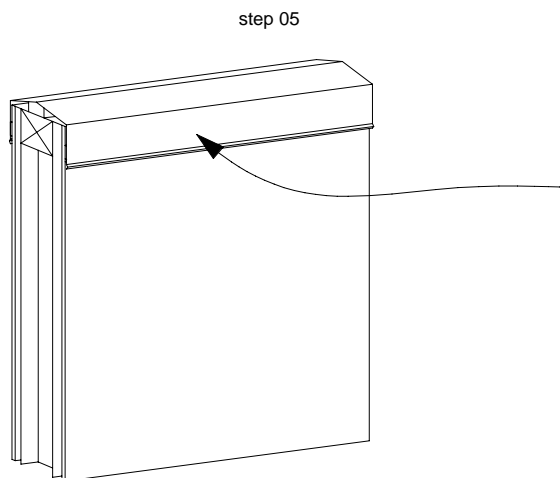

Metal capping lapping with cladding in accordance with NZBC E2/AS1 provide fixing to capping through sides of capping only.

Note:

- Protecto Wrap products are designed to be covered and are therefore not UV stable - cover within four weeks of installation.
- Do not fix metal cap through top.

Protecto Wrap Specifiers Guide	Parapet flashing system Metal capping Protecto Tape - EIFS Tape (Installation Steps) <small>Technical specification subject to change without notice</small>	CAD Ref: PW02.1	Sheet : 03.2.3
		Date : April 2005	
		Revision :	